


■ 包装仕様 PACKAGING SPECIFICATIONS

- ツツラパック式 / Tape-Ammo

Unit : mm




包装 Packaging ケースサイズ Case size	内箱 Inner box			外箱 Outer carton				
	収容数量(個) Quantity (pcs)	W	L	H	収容数量(個) Quantity (pcs)	W	L	H
4 x 5~7	2,500	230	335	53	25,000	350	476	290
5 x 5~11	2,000				20,000			
6.3 x 5~15	1,500				15,000			
8 x 5~20	1,000				10,000			
10 x 12~20	600				8,000			
13 x 13~26	300	300	340	70	3,000	350	476	290
16 x 26~32	300	300	340	70	3,000			
16 x 36	300	300	340	70	3,000			
16 x 36	300	300	340	70	3,000			
18 x 36	250	300	340	70	2,500			

■ リード線加工仕様 / Lead Cut and Forming Specifications


Unit : mm

リードフォーミング Lead forming
(φ5~φ8) Lead forming code : FC5




φD	5	6.3	8
φd	0.5	0.5	0.6
F	5.0		

リードカット Lead cutting
(φ5~φ18)
Lead cutting code : C (x)




φD	5	6.3	8	10	12.5	16	18
φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5
H	Length required						

キンクリードフォーミング
Kinked lead forming
(φ5~φ8)
Kinked lead forming code : KC




φD	5	6.3	8	10	12.5	16	18
H1	4.5						
H2	2.8						
H3	2.5			---			
F	5.0					7.5	
P	1.0						
E	1.2			1.3			
φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8

キンクリードカット
Kinked lead cutting
(φ10~φ18)
Kinked lead cutting code : KC



横置き対応品 (φ10~φ18) / Low profile with horizontal mounting


Code: FB (L)

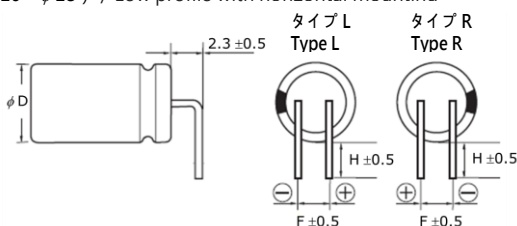

φD	10		12.5		16		18	
	L	R	L	R	L	R	L	R
φd	0.6				0.8			
F	5.0				7.5			
H	4.0		3.5		4.0		3.5	


■ ヨコ形テーピング品 (CE02 形) AXIAL LEAD TYPE TAPING SPECIFICATIONS

- テーピング形状寸法図及び規格表 Dimension & Specifications

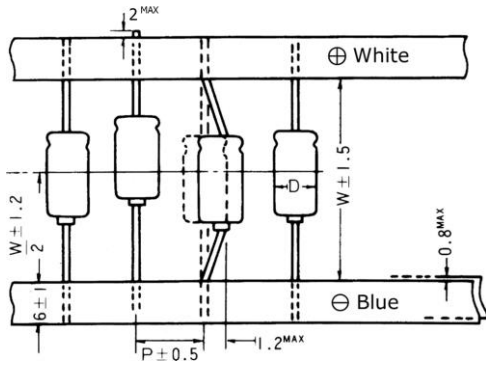

包装 Package	ケースサイズ Case Size	W (mm)	P (mm)	加工記号 Code
リールタイプ Reel Type	φ5 ~ φ8	52.4	10	TR0
		63.5	10	TR1
	φ10 ~ φ12.5	52.4	15	TR6
		63.5	15	TR7

- 包装仕様 Packing specifications

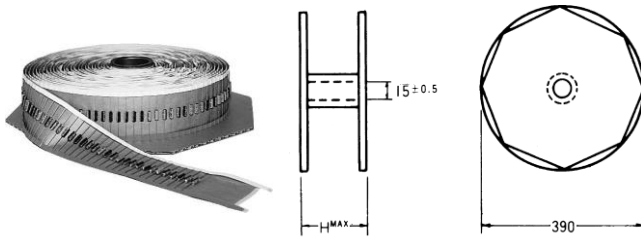

ケースサイズ Case Size	W (mm)	H (mm)	収容数量(個)/内箱 Q'ty/Box(pcs)	収容数量(個)/外箱 Q'ty/Carton(pcs)
φ5	52.4	82	1,500	7,500
φ6.3 ~ φ8			1,000	6,000
φ5 ~ φ8	63.5	93	1,500	7,500
φ6.3 ~ φ8			1,000	6,000
φ10			500	2,500
φ12.5			300	1,500